

Linear · PD Series White 5000K

lumher



24 V
DC

MASTER
SLAVE

NOT
CASCADABLE

90 mm
INCREMENTAL

CABLE
M12A

MACHINE VISION

POWER 1x
STROBE 4x

INTEGRATED
CONTROLLER

POLARIZED

IP40
IP65

36
MONTHS

EU
MADE IN SPAIN


Technical specifications

Power supply voltage	24 Vdc ±5%	
Trigger input	24 Vdc PNP	
Max. on time	Power = unlimited	Strobe = 10 ms
Max. working cycle	Power = 1	Strobe = 1/6
Max. number of cascable modules	This luminaire is not cascable	
Wavelength	White	5000 K
Angle of aperture	Semidiffuse Ultradiffuse	60° 110°
Electrical protections	Transient overvoltages Polarity reversal Current sablizer	YES YES YES
IP Rating	IP40 o IP65	
Protection type	Class III	
Operating temperature	-10 a +40 °C	
Body material	Anodized aluminum	
Side cover material	Anodized aluminum	
Diffuser material	Polycarbonate	
Connection types	M12A, 2m cable, M12A connector with cable	
Standards	RoHs, CE	

Connection

M12A input - Cable	Power	Master Power - Strobe	Slave Power - Strobe
Pin 1 - Brown	+24 Vdc	+24 Vdc	+24 Vdc
Pin 2 - White	Not connected	Not connected	Not connected
Pin 3 - Blue	0 Vdc	0 Vdc	0 Vdc
Pin 4 - Black	Not connected	Trigger PNP	Signal IN - a

M12A Male

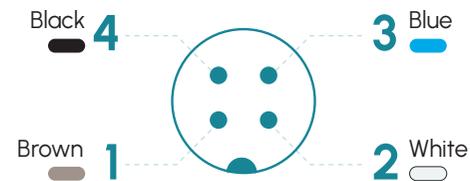

Fixings

P00G1 , P00G2, P00G3, P00R1, P00R2, P00R3, P00R4, M6D16

PD · 5000K




lumher


Measures

IP40

M12A axial version

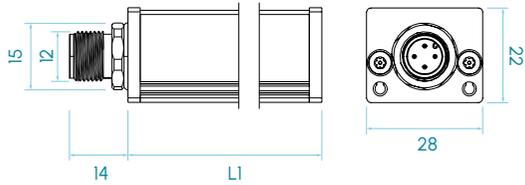


M12A radial version

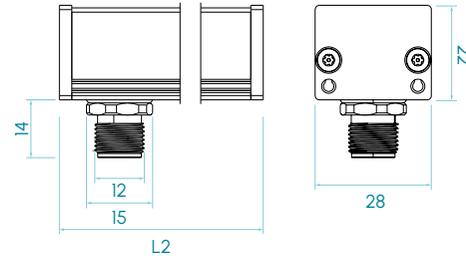


IP65

M12A axial version

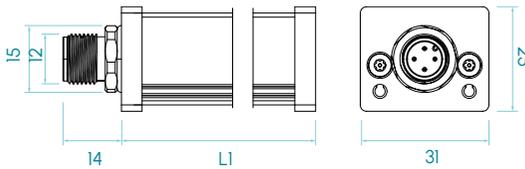


M12A radial version

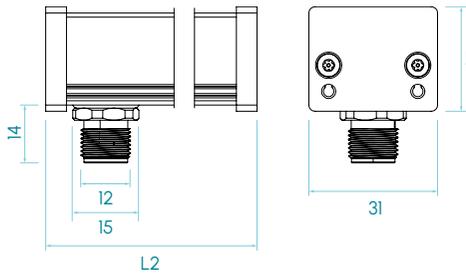

Measures in mm

PD · 5000K

Selection guide

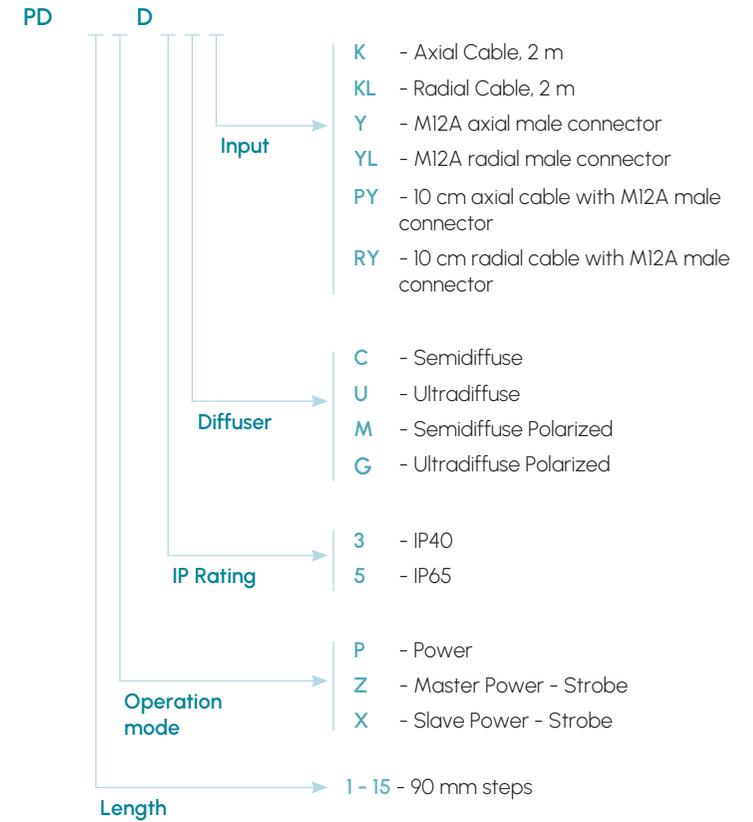

Model PD · White 5000K



5000K

WHITE



SEMIDIFFUSE
60°



ULTRADIFFUSE
110°

PHOTOBIOLOGICAL
RISK

RG1 - LOW

60.000h

LIFESPAN

Table of characteristics

	Length	Length	Weight	Luminous flux ⁽²⁾		Power consumed	
	L1 ⁽¹⁾	L2 ⁽¹⁾		(lm)		(W)	
	(mm)	(mm)		POWER	STROBE	POWER	STROBE
PD 01...	120	138	97	304	1.216	1,9	7,6
PD 02...	210	228	145	608	2.432	3,8	15,2
PD 03...	300	318	193	912	3.648	5,7	22,8
PD 04...	390	408	241	1.216	4.864	7,6	30,4
PD 05...	480	498	289	1.520	6.080	9,5	38,0
PD 06...	570	588	337	1.824	7.296	11,4	45,6
PD 07...	660	678	385	2.128	8.512	13,3	53,2
PD 08...	750	768	433	2.432	9.728	15,2	60,8
PD 09...	840	858	481	2.736	10.944	17,1	68,4
PD 10...	930	948	529	3.040	12.160	19,0	76,0
PD 11...	1.020	1.038	577	3.344	13.376	20,9	83,6
PD 12...	1.110	1.128	625	3.648	14.592	22,8	91,2
PD 13...	1.200	1.218	673	3.952	-	24,7	-
PD 14...	1.290	1.308	721	4.256	-	26,6	-
PD 15...	1.380	1.398	769	4.560	-	28,5	-

(1) Versions with radial input and/or radial output will have as length L2, the rest will be L1.

(2) The luminous flux (lm) is before diffuser.

PD

lumher